


STEREOLITHOGRAPHY PC-LIKE TRANSLUCENT

(ADVANCED HIGH TEMP)

Supplier Data Sheet: [Accura 5530](#)

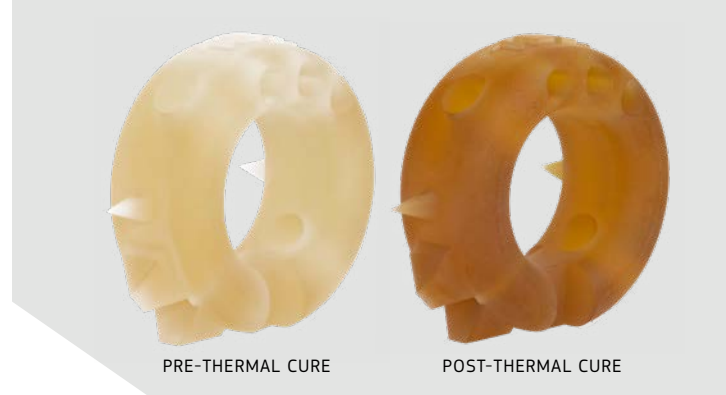

PRODUCT DESCRIPTION

PC-Like Translucent (Advanced High Temp) is best used for parts that need strength and stiffness combined with high temperature resistance. With a thermal post-cure, the part's heat deflection can be improved even further, but at the expense of durability.

APPLICATIONS

Advanced PC-Like High-Temp Translucent works well for parts that require high temperature resistance such as under-the-hood-automotive or electrical components.



KEY PRODUCT BENEFITS

- High temperature resistance
- Higher resistance to heated fluids
- Translucent

PROPERTIES

PROPERTY	TEST METHOD	VALUE	AFTER OPTIONAL THERMAL POST-CURING
Colour	-	Light Tan	Amber
Density in solid state*	@ 25 °C (77 °F)	1.25 g/cm ³	-
Water absorption (20 °C, 50% relative humidity)	DIN EN ISO 62	0,55 ± 0.15%	0.55 ± 0.15%
E-module (x-y plane)	DIN EN ISO 527, test speed 10mm/min	3,400 ± 400 MPa	3,900 ± 400 MPa
Tensile strength (x-y plane)		50 ± 10 MPa	45 ± 10 MPa
Elongation at break (x-y plane)		3 ± 2%	1.5 ± 1%
Heat deflection temperature @ 0,46 MPa*	DIN EN ISO 75	70 – 85 °C (158 – 185 °F)	170 – 250 °C (338 – 482 °F)
Heat deflection temperature @ 1,82 MPa*		55 – 58 °C (131 – 136 °F)	110 – 120 °C (230 – 248 °F)

*From supplier data sheet

TOLERANCES

For parts that are built in High Resolution (HR): The tolerances for well-designed parts are in the X / Y direction ± 0.05mm plus an additional ± 0.001mm / mm; In Z direction ± 0.13mm plus additional ± 0.001mm / mm. For parts that are built in Normal Resolution (NR): The tolerances for well-designed parts are in the X / Y direction ± 0.1mm plus an additional ± 0.001mm / mm; In Z direction ± 0.13mm plus additional ± 0.001mm / mm. Note that tolerances may change depending on part geometry